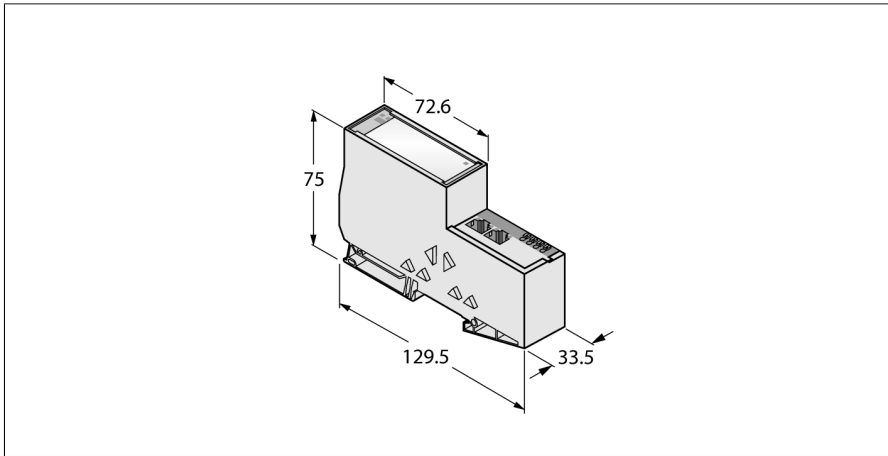


# Gateway for the BL20 I/O System

## High-Feature Interface for PROFINET (IRT)

### BL20-E-GW-PN

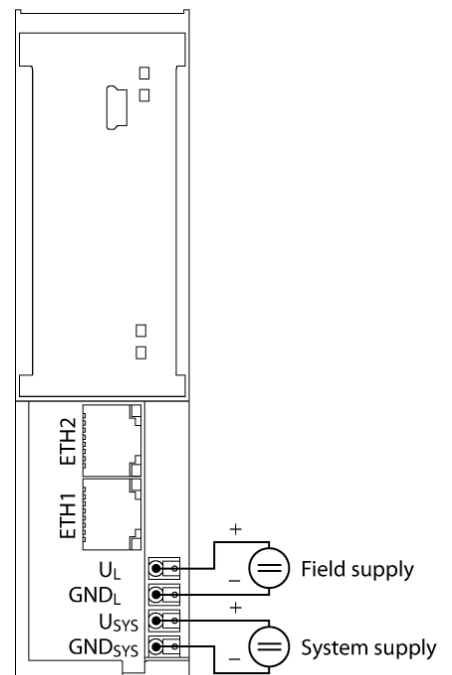


- Protection class IP20
- 2 x end brackets BL20-WEW35/2-SW
- 1 x end plate BL20-ABPL
- LEDs for display of supply voltage, group and bus errors
- Gateway between the BL20 system and PROFINET (IRT)
- Supports topology recognition and LLDP
- 10/100 Mbps, Auto MDIX
- 2 x RJ45 port

Attention: This gateway is nearing the end of the product life cycle

Type	BL20-E-GW-PN
ID	6827377
Supply voltage	24 VDC
System power supply	24 VDC / 5 VDC
Field supply	24 VDC
Admissible range	18...30 VDC
Nominal current from module bus	≤ 200 mA
Max. field supply current	8 A
Max. system supply current	0.8 A
Voltage supply connection	Push-in terminals
<b>System data</b>	
Max. number of I/O modules	72
Transmission rate	10/100 Mbps; full/half duplex; auto negotiation; auto crossing
Connection technology Ethernet	2 × RJ45 female connector
Service interface	Mini USB
<b>PROFINET</b>	
Addressing	DCP
Conformance class	C (IRT)
MinCycleTime	1 ms
Diagnostics	acc. to PROFINET alarm handling
Topology detection	supported
Automatic addressing	supported
Media Redundancy Protocol (MRP)	not supported
Dimensions (W x L x H)	33.5 x 129.5 x 74.4 mm
Approvals	CE
Ambient temperature	0...+55 °C
Storage temperature	-25...+85 °C
Relative humidity	15...95 %, no condensation allowed
Vibration test	Acc. to EN 61131
Shock test	Acc. to IEC 60068-2-27
Drop and topple	acc. to IEC 68-2-31 and free fall to IEC 68-2-32
Electromagnetic compatibility	Acc. to EN 50082-2
Protection class	IP20

#### Field/System Supply



#### Functional principle

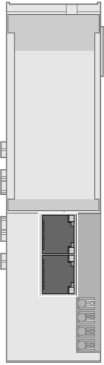

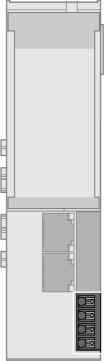


BL20 gateways are the head component of a BL20 station. They are designed to interface the modular fieldbus nodes to the higher level fieldbus (PROFIBUS-DP, DeviceNet, CANopen, Ethernet).

All BL20 electronic modules communicate over the internal module bus, the data of which is transferred to the fieldbus via the gateway, so that all I/O modules can be configured independently of the bus system.


Included in delivery

2 x end brackets BL20-WEW-35/2-SW, 1 x end plate  
BL20-ABPL

## Anschlussübersicht

	<p><b>PROFINET</b></p> <p>Fieldbus cable (example):          RJ45S-RJ45S-441-2M (ident no. 6932517) or          RJ45-FKSDD-441-0,5M/S2174 (ident no. 6914221)</p>	<p>Pin Assignment</p> <div style="display: flex; align-items: center;"> <div style="margin-right: 20px;"> <p>ETH2</p> <p>1 8</p> </div>  <div style="margin-left: 20px;"> <p>1 = TX +              2 = TX -              3 = RX +              4 = n.c.              5 = n.c.              6 = RX -              7 = n.c.              8 = n.c.</p> </div> </div>
	<p><b>Power Supply</b></p> <p>The <math>U_{SYS}</math> system supply feeds power to the gateway and the I/O modules.</p> <p>The <math>U_L</math> field supply feeds power to the sensors and actuators.</p>	<p>Pin Assignment</p> <div style="display: flex; align-items: center;"> <div style="margin-right: 20px;"> <p><math>U_L</math></p> <p>GND<sub>L</sub></p> </div>  <div style="margin-left: 20px;"> <p>Field supply</p> </div> <div style="margin-right: 20px; margin-left: 20px;"> <p><math>U_{SYS}</math></p> <p>GND<sub>SYS</sub></p> </div>  <div style="margin-left: 20px;"> <p>System supply</p> </div> </div>

## Accessories

Type code	Ident-No.		Dimension drawing
BL20-ABPL (2 PCS.)	6827123	End plate for a BL20 station after the last I/O module (2 pieces)	
BL20-WEW-35/2-SW (10 PCS.)	6827124	End bracket for fixation of a BL20 station (10 pieces)	