


# Easy Harmony XVG Ø 60 monolithic tower lights

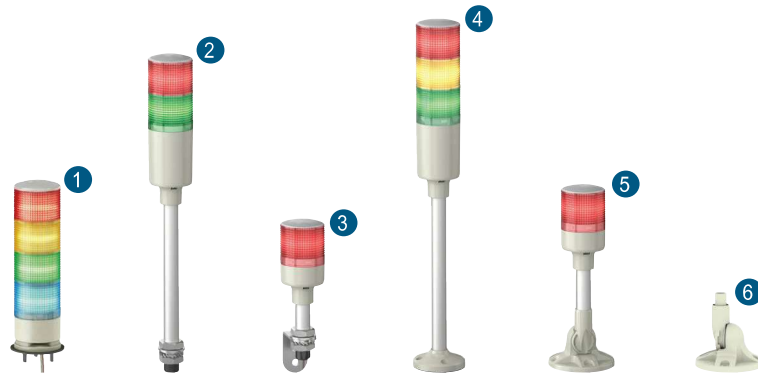

1

| 1 With base mounting                                |                            |                                                    |            |                         |            |                         |                                 |                                 |  |
|-----------------------------------------------------|----------------------------|----------------------------------------------------|------------|-------------------------|------------|-------------------------|---------------------------------|---------------------------------|--|
| Light source                                        |                            | LED for steady light                               |            |                         |            |                         |                                 |                                 |  |
| Colors (1)                                          |                            | ● Red, ● Green                                     |            | ● Red, ● Amber, ● Green |            |                         | ● Red, ● Amber, ● Green, ● Blue |                                 |  |
| Voltage                                             |                            | 24 VAC/VDC                                         | 220~240VAC | 24 VAC/VDC              | 220~240VAC |                         | 24 VAC/VDC                      |                                 |  |
| Reference                                           | Without buzzer, IP 53      | XVGB2W                                             | XVGM2W     | XVGB3W                  | XVGM3W     |                         | XVGB4W                          |                                 |  |
|                                                     | With buzzer, IP 42         | XVGB2SW                                            | XVGM2SW    | XVGB3SW                 | XVGM3SW    |                         | XVGB4SW                         |                                 |  |
| 2 With direct aluminium tube mounting               |                            |                                                    |            |                         |            |                         |                                 |                                 |  |
| Light source                                        |                            | LED for steady light                               |            |                         |            |                         |                                 |                                 |  |
| Colors (1)                                          |                            | ● Red, ● Green                                     |            | ● Red, ● Amber, ● Green |            |                         | ● Red, ● Amber, ● Green, ● Blue |                                 |  |
| Voltage                                             |                            | 24 VAC/VDC                                         | 220~240VAC | 24 VAC/VDC              | 220~240VAC |                         | 24 VAC/VDC                      |                                 |  |
| Reference                                           | Without buzzer, IP 23      | XVGB2T                                             | XVGM2T     | XVGB3T                  | XVGM3T     |                         | -                               |                                 |  |
|                                                     | With buzzer, IP 23         | XVGB2ST                                            | XVGM2ST    | XVGB3ST                 | XVGM3ST    |                         | XVGB4ST                         |                                 |  |
| 3 With aluminium tube mounting and L-bracket        |                            |                                                    |            |                         |            |                         |                                 |                                 |  |
| Light source                                        |                            | LED for steady light                               |            |                         |            |                         |                                 |                                 |  |
| Colors (1)                                          |                            | ● Red                                              |            | ● Red, ● Green          |            | ● Red, ● Amber, ● Green |                                 | ● Red, ● Amber, ● Green, ● Blue |  |
| Voltage                                             |                            | 24 VAC/VDC                                         | 220~240VAC | 24 VAC/VDC              | 220~240VAC | 24 VAC/VDC              | 220~240VAC                      | 24 VAC/VDC                      |  |
| Reference                                           | Flashing light with buzzer | XVGB1SFA                                           | XVGM1SFA   | -                       | -          | -                       | -                               | -                               |  |
|                                                     | Without buzzer, IP 23      | XVGB1A                                             | XVGM1A     | XVGB2                   | XVGM2      | XVGB3                   | XVGM3                           | XVGB4                           |  |
|                                                     | With buzzer, IP 23         | XVGB1SA                                            | XVGM1SA    | XVGB2S                  | XVGM2S     | XVGB3S                  | XVGM3S                          | XVGB4S                          |  |
| 4 With aluminium tube mounting and fixing plate     |                            |                                                    |            |                         |            |                         |                                 |                                 |  |
| Light source                                        |                            | LED for steady light                               |            |                         |            |                         |                                 |                                 |  |
| Colors (1)                                          |                            | ● Red, ● Green                                     |            | ● Red, ● Amber, ● Green |            |                         | ● Red, ● Amber, ● Green, ● Blue |                                 |  |
| Voltage                                             |                            | 24 VAC/VDC                                         | 220~240VAC | 24 VAC/VDC              | 220~240VAC |                         | 24 VAC/VDC                      |                                 |  |
| Reference                                           | Without buzzer, IP 53      | XVGB2H                                             | XVGM2H     | XVGB3H                  | XVGM3H     |                         | XVGB4H                          |                                 |  |
|                                                     | With buzzer, IP 42         | XVGB2SH                                            | XVGM2SH    | XVGB3SH                 | XVGM3SH    |                         | XVGB4SH                         |                                 |  |
| 5 With aluminium tube mounting and foldable bracket |                            |                                                    |            |                         |            |                         |                                 |                                 |  |
| Light source                                        |                            | LED for steady light                               |            |                         |            |                         |                                 |                                 |  |
| Colors (1)                                          |                            | ● Red                                              |            | ● Red, ● Green          |            | ● Red, ● Amber, ● Green |                                 | ● Red, ● Amber, ● Green, ● Blue |  |
| Voltage                                             |                            | 24 VAC/VDC                                         | 220~240VAC | 24 VAC/VDC              | 220~240VAC | 24 VAC/VDC              | 220~240VAC                      | 24 VAC/VDC                      |  |
| Reference                                           | Flashing light with buzzer | XVGB1SM-FA                                         | XVGM1SM-FA | -                       | -          | -                       | -                               | -                               |  |
|                                                     | Without buzzer, IP 53      | XVGB1MA                                            | XVGM1MA    | XVGB2M                  | XVGM2M     | XVGB3M                  | XVGM3M                          | XVGB4M                          |  |
|                                                     | With buzzer, IP 42         | XVGB1SMA                                           | XVGM1SMA   | XVGB2SM                 | XVGM2SM    | XVGB3SM                 | XVGM3SM                         | XVGB4SM                         |  |
| 6 Accessories (for association)                     |                            |                                                    |            |                         |            |                         |                                 |                                 |  |
| Color                                               |                            | ● White                                            |            |                         |            |                         |                                 |                                 |  |
| Unit type                                           |                            | Folding mounting bracket for support tube mounting |            |                         |            | Wall mounting bracket   |                                 |                                 |  |
| Reference                                           |                            | XVGZ02 (2)                                         |            |                         |            | XVMZ02W (3)             |                                 |                                 |  |

(1) The colors are listed in the same order as the mounting order of the illuminated units (from top to bottom).

(2) Compatible with XVGB●H, XVGB●SH, XVGB●M●, XVGB●SM●, XVGM●H, XVGM●SH, XVGM●M●, XVGM●SM.

(3) Compatible with XVGB●T, XVGB●ST, XVGM●T, XVGM●ST.

**Note:** Commercial references ending with "A" have shorter pole length.