

Han 3A-C/P-f.Hood-DL-seal-grey-w.cord

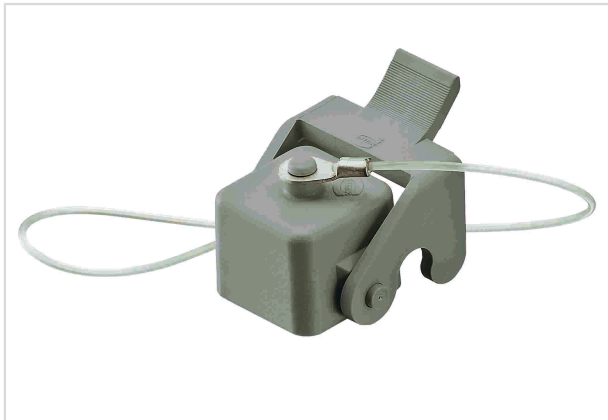


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 09 20 003 5441 |
| Specification | Han 3A-C/P-f.Hood-DL-seal-grey-w.cord |
| HARTING eCatalogue | https://b2b.harting.com/09200035441 |

Identification

| | |
|-----------------------------|--------------------|
| Category | Hoods/Housings |
| Series of hoods/housings | Han A [®] |
| Type of hood/housing | Protection cover |
| Description of hood/housing | for hoods |
| | Thermoplastic |
| | With fixing cord |
| | With seal |

Version

| | |
|----------------------|---|
| Locking type | Single locking lever |
| Size | 3 A |
| Field of application | Standard Hoods/housings for industrial applications |
| Details | for mounted female insert or for mounted Han-Brid [®] insert |

Technical characteristics

| | |
|--|--|
| Limiting temperature | -40 ... +125 °C |
| Degree of protection acc. to IEC 60529 | IP44 |
| | IP65 / IP67 with seal screw 09 20 000 9918 |
| Type rating acc. to UL 50 / UL 50E | 4 |
| | 4X |
| | 12 |

Material properties

| | |
|-------------------------|------------------------|
| Material (hood/housing) | Polycarbonate (PC) |
| Colour (hood/housing) | RAL 7032 (pebble grey) |



Pushing Performance

Material properties

| | |
|---|------------------------|
| Material (seal) | NBR |
| Material (locking) | Polyamide (PA) |
| Colour (locking) | RAL 7032 (pebble grey) |
| Material flammability class acc. to UL 94 | V-0 |
| RoHS | compliant |
| ELV status | compliant |
| China RoHS | e |
| REACH Annex XVII substances | No |
| REACH ANNEX XIV substances | No |
| REACH SVHC substances | No |

Specifications and approvals

| | |
|-----------|--------|
| Approvals | DNV GL |
|-----------|--------|

Commercial data

| | |
|--------------------------------|--|
| Packaging size | 10 |
| Net weight | 10.36 g |
| Country of origin | Romania |
| European customs tariff number | 85389099 |
| eCl@ss | 27440208 Cap for industrial connectors |