

Contact us

ABB Oy

Muottitie 2A 65320

Vaasa, Finland



abb.com/lowvoltage




© Copyright 2025 ABB. All rights reserved.
Specifications subject to change without notice.

34OT_G2-34 rev. C / 1SCC301134M0201 # 04.04.2025


OT Plus OT63...100G2-

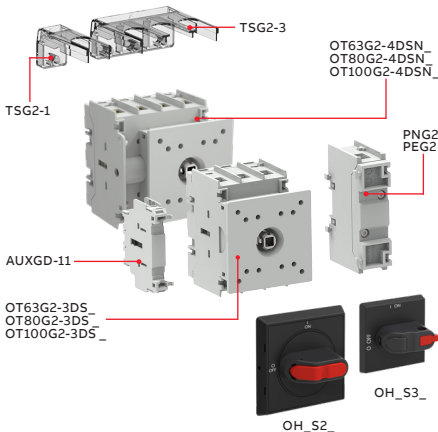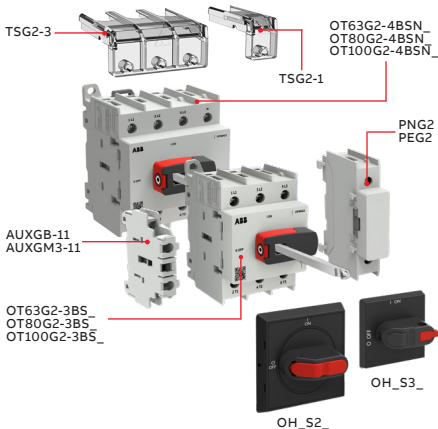

Mounting

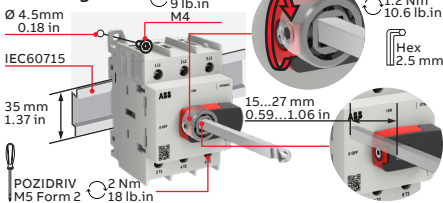

Padlock




Adjustable neutral pole timing




- 2 Simultaneous (default)
- 1
- 2 Early-make Late-break
- 1

Clearances per UL60947-4-1



Wire type (Cu only)	1 Wire (mm ²)	2 Wire (mm ²)	Stripping length	Tightening torque
Class 5-Flexible	1.5-35	1.5-16		
Class 2-Stranded	1.5-35	1.5-16		
Class 6-Very flexible with ferrule	1.5-4	1.5-4		
Class 1-Solid	1.5-6	1.5-6		
UL - CU wire size (AWG)	16-2	16-8		



2 Nm
18 lb.in



Warning! Hazardous voltage! Installation by person with electrotechnical expertise only.

