

Contact us

ABB Oy

Muottitie 2A 65320

Vaasa, Finland


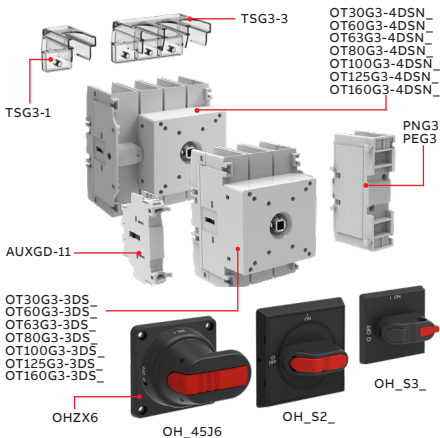


abb.com/lowvoltage


© Copyright 2026 ABB. All rights reserved.
Specifications subject to change without notice.

34OT_G3-34 rev. A / CN / 15CC301127M2901 # 09.09.2026


OT Plus OT30...160G3-

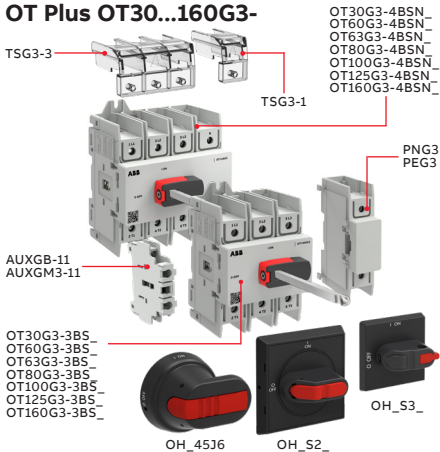


Mounting 安装

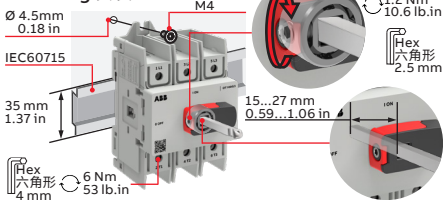

Padlock 挂锁





Adjustable neutral pole timing 可调的N极时序



- 2 Simultaneous
1 同步
(default)
(默认)
- 2 Early-make
1 Late-break
2 提前闭合
1 延迟断开

Clearances per UL98 电气间隙适用于UL98



Minimum enclosure size or equivalent volume
安装在柜体中的最小绝缘距离

	H	W	D	A	B	C
OT30G3- OT60G3-	203 mm 8 in	152 mm 6 in	102 mm 4 in	0	0	13 mm 0.5 in
OT100G3-	300 mm 11.8 in	200 mm 7.9 in	135 mm 5.3 in	0	0	13 mm 0.5 in

Wire type 电缆导体类型 (Cu only)	1 Wire (mm ²)	2 Wire (mm ²)	Stripping length 剥离长度	Tightening torque 拧紧扭矩
Class 5-Flexible	4-70	4-25		 Hex 六角形 4 mm 6 Nm 53 lb.in
Class 2-Stranded	4-70	4-25		
Class 6-Very flexible with ferrule	2.5-4	2.5-4		
Class 1-Solid	2.5-6	2.5-6		



Warning! Hazardous voltage! Installation by person with electrotechnical expertise only.



警告! 危险电压! 仅限电工专业人员安装。

