



Motor protective
circuit breaker
SM1R

Product designation

Product type designation

Electrical features

| | | |
|--------------------------------------|-----|---------|
| Number of poles | nr. | 3 |
| Magnetic protection | | yes |
| Thermal protection | | yes |
| Phase failure detection | | yes |
| Rated insulation voltage Ui IEC/EN | V | 690 |
| Rated impulse withstand voltage Uimp | kV | 6 |
| Rated frequency | Hz | 50/60 |
| Thermal trip adjustment range | | 17...23 |
| Rated current (In) | A | 23 |
| Magnetic tripping | | 13 x In |
| Total power dissipation | W | 3.41 |

Operational short-circuit current breaking capacity (Ics) at AC

| | | |
|------|----|-----|
| 230V | kA | 100 |
| 400V | kA | 25 |
| 440V | kA | 5 |
| 500V | kA | 5 |
| 690V | kA | 2 |

Maximum short-circuit current breaking capacity (Icu) at AC

| | | |
|------|----|-----|
| 230V | kA | 100 |
| 400V | kA | 25 |
| 440V | kA | 50 |
| 500V | kA | 10 |
| 690V | kA | 4 |

Tripping class

10A

IEC Utilization category

A

Operations

| | | |
|-----------------|--------|--------|
| Mechanical life | cycles | 100000 |
| Electrical life | cycles | 100000 |

Mechanical features

Tightening torque for terminals

| | | |
|-----|------|-----|
| min | Nm | 2.5 |
| Max | Nm | 3 |
| min | Ibin | 1.8 |
| max | Ibin | 2.2 |

Max number of wires simultaneously connectable

nr. 2

Conductor section


AWG/Kcmil

| | |
|-----|----|
| min | 16 |
| max | 8 |


Flexible w/o lug conductor section

| | | |
|-----|-----------------|---|
| min | mm ² | 1 |
|-----|-----------------|---|

| | | | |
|---|------------------|------------------|--------------|
| Flexible c/w lug conductor section | min | mm ² | 1 |
| Flexible with insulated spade lug conductor section | min | mm ² | 1 |
| Screwdriver | | | PH2 |
| Power terminal protection according to IEC/EN 60529 | | | IP20 |
| Cable stripping length | main circuit | mm | 1 |
| Ambient conditions | | | |
| Temperature | | | |
| Operating temperature | min | °C | -20 |
| | max | °C | 60 |
| Storage temperature | min | °C | -50 |
| | max | °C | 80 |
| Compensation temperature | min | °C | -20 |
| | max | °C | 50 |
| Max altitude | | m | 3000 |
| Operating position | normal allowable | Vertical plan | Any |
| Fixing | | Screw / DIN rail | 35mm |
| Weight | | g | 390 |
| UL technical data | | | |
| Motor Disconnect | at 480V | kA | 30 |
| | at 600V | kA | 30 |
| | protection | | 200A class J |
| Group Motor Installation | at 480V | kA | 30 |
| | at 600V | kA | 30 |
| | protection | | 200A class J |
| Maximum UL/CSA horsepower ratings single-phase | 110V-120V | hp | 1.5 |
| | 220V-240V | hp | 3 |
| Maximum UL/CSA horsepower ratings three-phase, 3-pole | 200V-208V | hp | 5 |
| | 220V-240V | hp | 7.5 |
| | 440V-480V | hp | 15 |
| | 550V-600V | hp | 20 |
| Dimensions | | | |

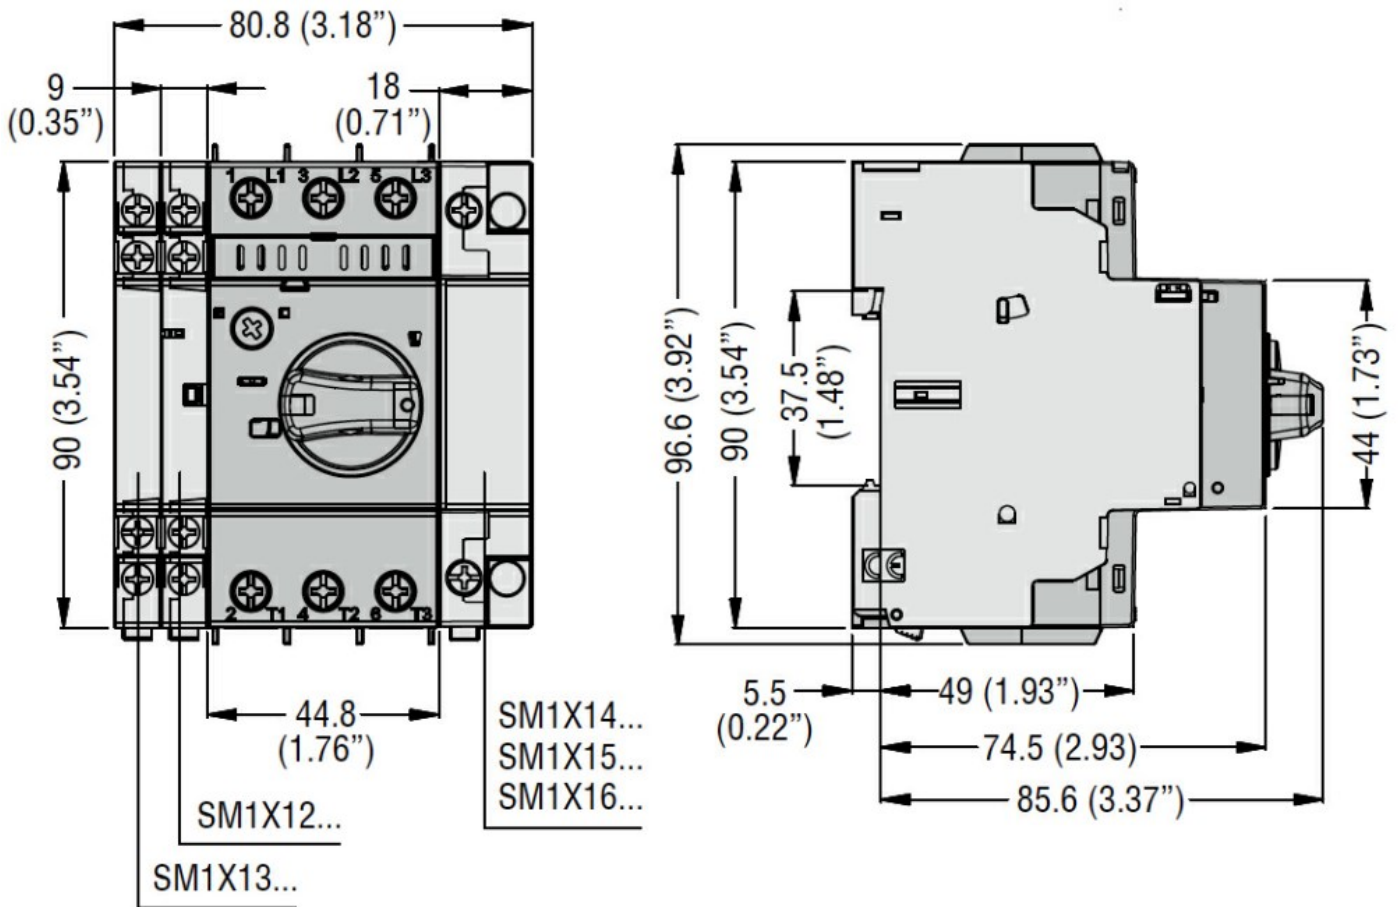

Wiring diagrams

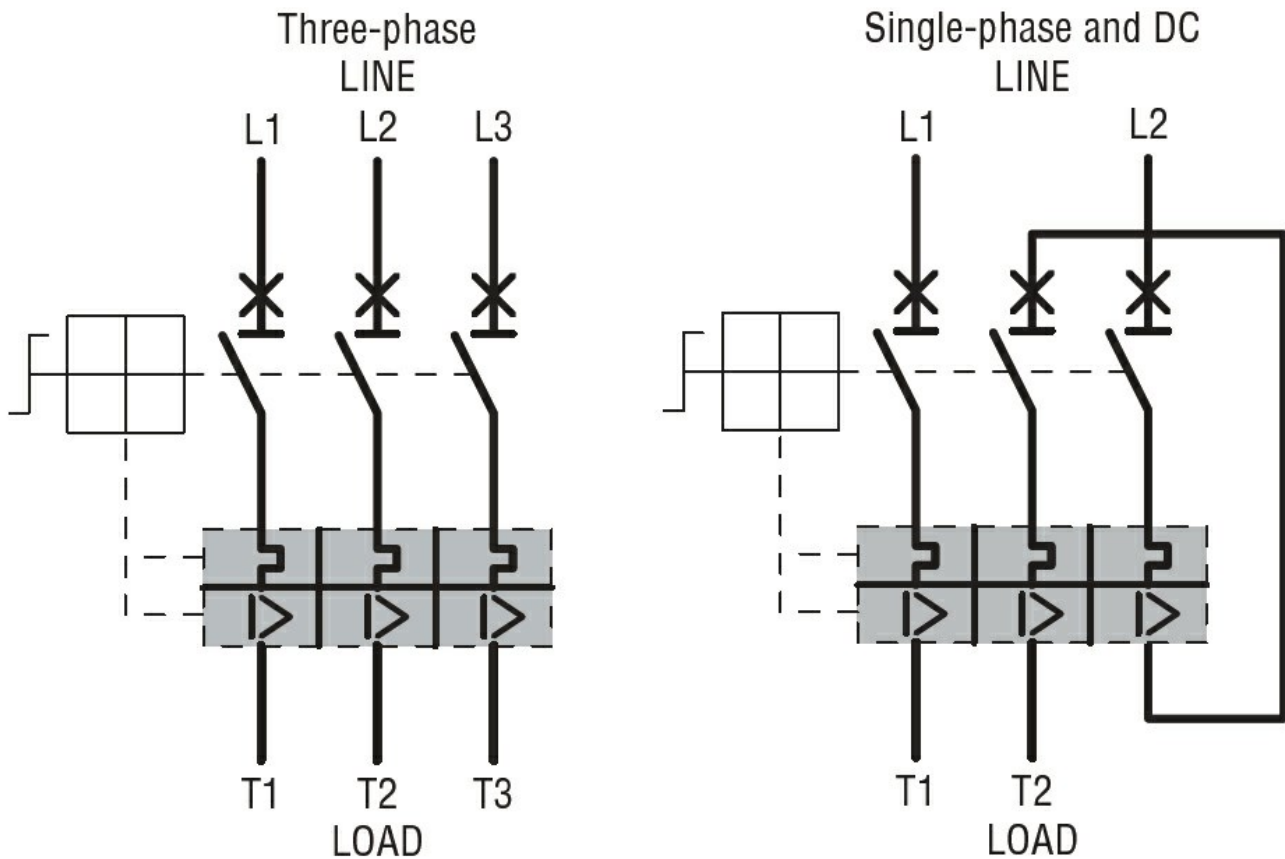

Certifications and compliance

Certifications

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-2

IEC/EN 60947-4-1

UL508

Compliance

cULus

EAC