



Product designation

RF110

Product type designation

Motor protection
relay

General characteristics

Number of poles	nr.	3
Overvoltage category		III
Pollution degree		3
Frontal IP degree		IP20
Type of release		Thermal
Protection fuse		
	gG (IEC)	A 200
	aM (IEC)	A 100
	K5 (UL)	A 350

Phase failure detection

yes

Reset mode

manual

Power circuit characteristics

Rated insulation voltage Ui IEC/EN	V	690
Rated impulse withstand voltage Uimp	kV	8
Rated operational voltage	V	690
Operational frequency		

Operational current Ie

Operational current min	A	70
Operational current max	A	95

Tripping class

10A

Test Button

yes

Trip indicator

yes

Terminals

type		Yoke clamp
screw		M5
width	mm	9
tool		Phillips 2

Tightening torque for terminals

min	Nm	3.9
Max	Nm	3.9
min	lbin	2.88
max	lbin	2.88

Conductor section

AWG/kcmil	max	2
-----------	-----	---

Auxiliary circuit characteristics


Auxiliary contacts

NO	nr.	1
NC	nr.	1


Auxiliary Rated insulation voltage Ui IEC/EN

V	690
---	-----

Auxiliary Rated impulse withstand voltage Uimp	kV	6
Auxiliary Rated operational voltage	V	690
Operating current AC15		
24V	A	1.5
120V	A	1.5
240V	A	0.75
500V	A	0.72
Operating current DC13		
125V	A	0.11
600V	A	0.22
IEC Conventional free air thermal current Ith	A	10
Terminals		
Auxiliary circuit type		screw and washer
Auxiliary circuit screw		M3,5
Auxiliary circuit width	mm	8
Auxiliary circuit tool		Phillips 1
Conductor section		
Auxiliary circuit Flexible w/o lug max	mm ²	2.5
Auxiliary circuit Flexible c/w lug max	mm ²	2.5
Tightening torque for terminals		
Auxiliary circuit min	Nm	1
Auxiliary circuit max	Nm	1
Auxiliary circuit min	Ibin	0.74
Auxiliary circuit max	Ibin	0.74
UL/CSA and IEC/EN 60947-5-1 designation		B600-P600
Ambient conditions		
Operating temperature		
min	°C	-20
max	°C	55
Storage temperature		
min	°C	-55
max	°C	80
Compensation temperature		
min	°C	-15
max	°C	55
Max altitude	m	3000
Mechanical features		
Operating position		
normal allowable		Vertical plan ±30°
Weight	g	365
UL technical data		
Full-load current (FLA) for three-phase AC motor		
at 480V	A	95
at 600V	A	95
Dimensions		

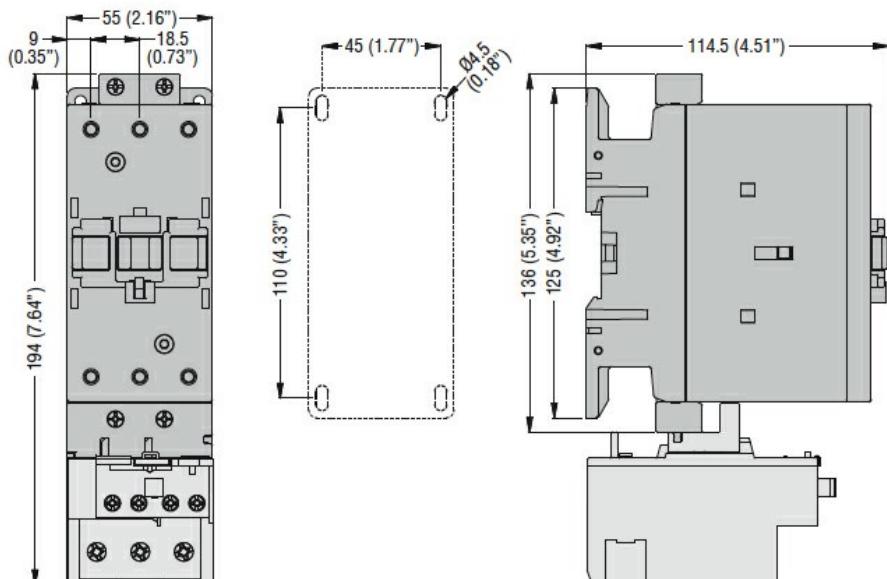

Wiring diagrams

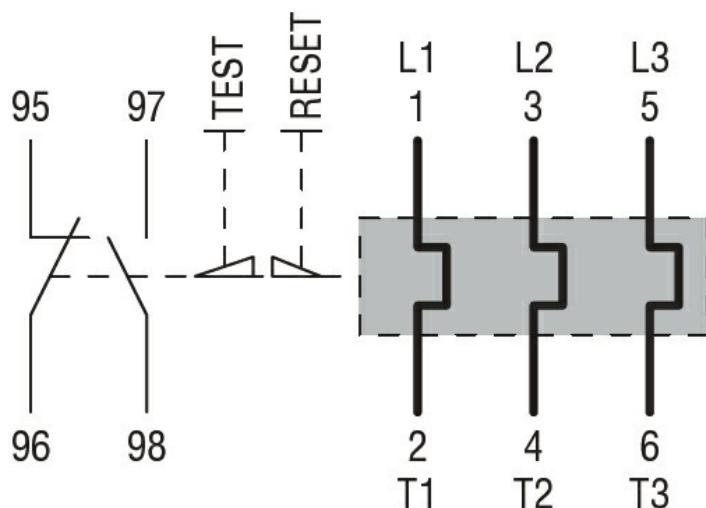

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-1

UL508

Certifications

CCC

cULus

EAC