



| | | |
|---|----------|--|
| Product designation | | Variable speed drives |
| Product type designation | | VLB3 |
| General characteristics | | |
| Rated power supply voltage | | Three phase 400...480VAC 50/60Hz |
| Rated output voltage | VAC | Three-phase 0... 480VAC 0-599Hz |
| Rated output current | A | 23.5 (heavy load) / 28.2 (standard load) |
| Rated output power | kW | 11 (Heavy load) / 15 (Standard load) |
| EMC filter | | Built-in EMC suppressor cat. C2 |
| Communication port | | Built-in RS485, Modbus RTU protocol |
| Technical features | | |
| Input type | | Three phase |
| Rated mains voltage | VAC | 400...480 |
| Operating mains voltage range | VAC | 340...528 |
| Rated mains frequency | Hz | 50/60 |
| Operating mains frequency range | Hz | 45...65 |
| Rated mains current without mains choke | | 28.4 (heavy load) |
| Rated mains current with mains choke | | 22.3 (heavy load) / 27.1 (standard load) |
| Output type | | three-phase |
| Output voltage range | VAC | 0...480 |
| Output frequency range | Hz | 0...599 |
| Current overload | %/s | 150% for 60s; 200% for 3s |
| Apparent output power | | 16 (heavy load) / 19 (standard load) |
| Power loss | | 4kHz: 260W (heavy load) / 309 (standard load) |
| Brake chopper | | Yes |
| Switching frequency | | 2...16kHz |
| Max motor cable length | | |
| | Shielded | |

| | | |
|----------------------|---|-----|
| Without EMC category | m | 100 |
| Category C1 | m | 3 |
| Category C2 | m | 20 |
| Category C3 | m | 50 |

Unshielded


| | | |
|----------------------|---|-----|
| Without EMC category | m | 200 |
|----------------------|---|-----|

Functions

| | |
|--|--|
| Motor control modes | V/f linear, quadratic torque, sensorless vector control, ECO mode, servo control with encoder feedback, multipoint V/f curve, V/f closed loop control with encoder feedback, torque setpoint, sensorless control for synchronous motors up to 22kW |
| Speed reference signals | External potentiometer 0...10kΩ Voltage signals: 0...10VDC or -10...+10VDC Current signals: 0/4...20mA Buttons on front keyboard Door-mount installation kit 15 preset speeds via digital inputs Motor potentiometer Fieldbus |
| 3-wire control | Yes |
| S-shape curves | Yes |
| Slip compensation | Yes |
| Flying restart | Yes |
| Access to DC bus | Yes |
| DC braking | Yes |
| DC injection at start | Yes |
| PID control | Yes, with sleep and rinse function |
| Sequencer (programmable frequency/time cycles) | Yes |
| Preset speeds | Yes |
| Motorpotentiometer | Yes |
| Different parameter configuration sets | Yes |
| Parameters changeover function | Yes |

| | | |
|---------------------------------------|-----------------------|--|
| Favorite parameters menu | | Yes |
| Autotuning | | No |
| Safe torque Off (STO) safety function | | Optional |
| PTC probe input | | Yes |
| Protections | | Overcurrent Output short circuit and earth/ground leakage Overvoltage Undervoltage Phase loss Motor heat overload (i2t) Overspeed Speed reverse |
| Special funct. | | Multi-pump PID control (1 main pump frequency regulated + 2 auxiliary pumps activated in direct mode in case of necessity) |
| Input and Output | | |
| Number of digital input | n° | 5 |
| Digital input type | | Selectable PNP or NPN logic |
| Number of digital output | n° | 2 |
| Digital output arrangement | | 1 relay output with changeover contact (C/O-SPDT) + 1 digital output |
| Output contacts ratings | | Relay output: 3A 250VAC Digital output: 100mA max 30VDC |
| Number of analog input | n° | 2 |
| Analog input type | | Configurable 0/2...10VDC, -10...+10VDC, 0...5VDC, 0/4...20mA |
| Number of analog output | n° | 1 |
| Analog output type | | configurable as 0...10VDC, 0...5VDC, 2...10VDC, 0/4...20mA |
| Ambient conditions | | |
| Temperature | Operating temperature | |
| | min | °C -10 |
| | max | °C +55 |

| | | | |
|--------------------------|------------------|----|--|
| | | | switching frequency 2 or 4kHz: 2.5%/°C over 45°C |
| | Current derating | | switching frequency 8 or 16kHz: 2.5%/°C over 40°C |
| Storage temperature | | | |
| | min | °C | -25 |
| | max | °C | +60 |
| Relative humidity | | % | 5...95% (with no condensing) |
| Max altitude | | m | 4000m (over 1000m derate the rated current by 5%/1000m) |
| Maximum Pollution degree | | | 2 |
| Overvoltage category | | | III up to 2000m altitude (II above 2000m) |
| Housing | | | |
| Installation position | | | Vertical |
| IP degree of protection | | | IP20 |
| Dimensions (W x H x D) | | mm | 120 x 305 x 130 |
| Weight | | Kg | 3.95 |
| Dimensions | | | |

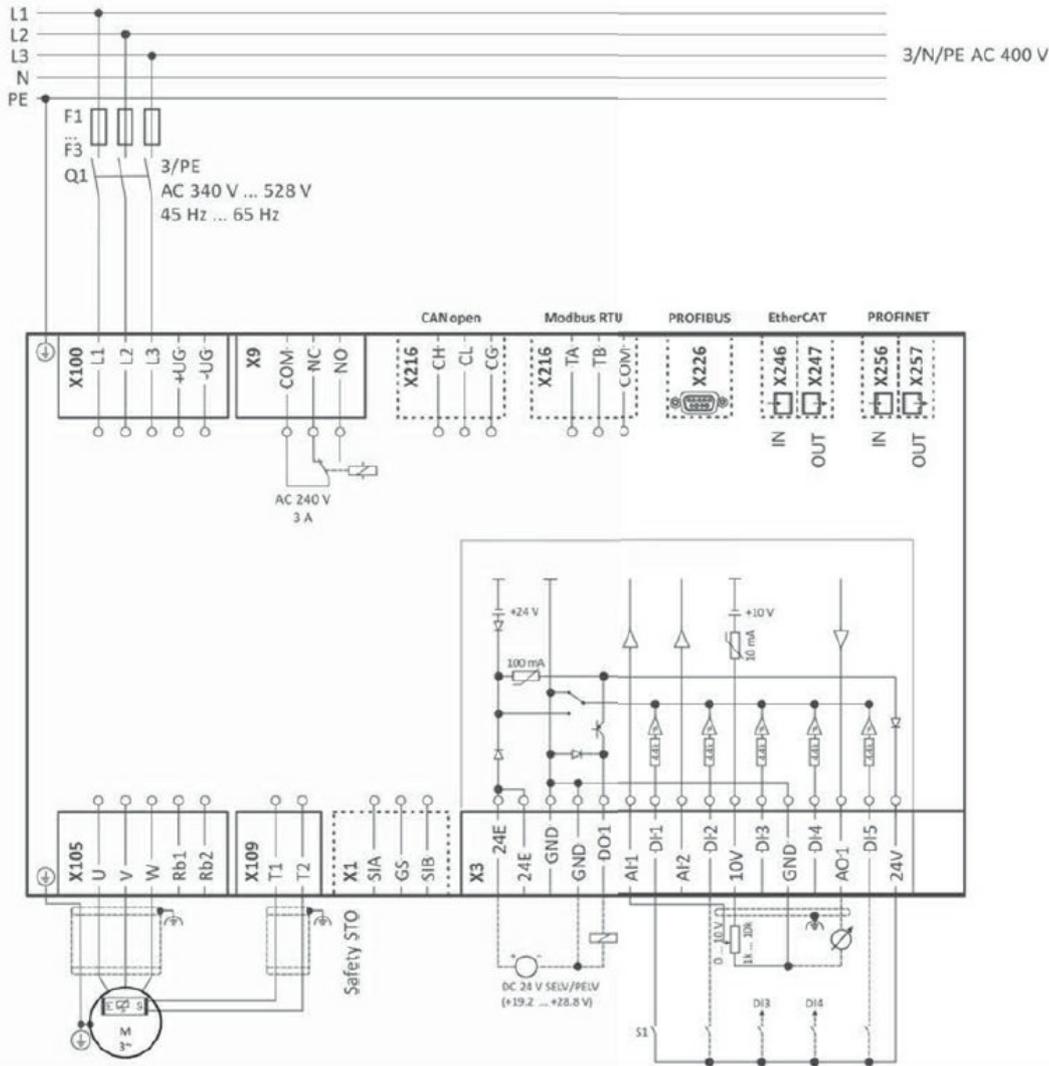

Certifications and compliance

Compliance

CSA 22.2 n°274
EN 61800-5-1
UL61800-5-1

Certificates

CSA
cULus
EAC
RCM