



Product designation	Soft Starter		
Product type designation	ADXL		
Motor type	Asynchronous three phase		
Electrical features			
Supplies voltage	Type of system	Three phase	
	Rated supply voltage	V	208...600 VAC ±10%
	auxiliary supply voltage (Us)		100...240VAC ±10%
	Rated frequency	Hz	50/60
Rated starter current Ie		A	45
Rated motor power	IEC ratings (T≤40°C)		
	230VAC	kW	11
	400VAC	kW	22
	500VAC	KW	30
	UL ratings (T≤40°C)		
	220-240VAC	hp	15
	380-415VAC	hp	25
	440-480VAC	hp	30
	550-600VAC	hp	40
Number of controlled phases		N°	2
Built-in bypass	Yes		
Cooling System	Natural or forced (optional)		
Rated insulation voltage Ui		V	600
Programming interface			
Display	Backlit icon LCD display		
Programming with NFC technology	Yes		
Optical port	Yes		
Startup and stop settings			
Startup method	Torque ramp with current limit, Voltage ramp with current limit, Constant torque with current limit		
Stop method	Torque ramp, voltage ramp, free-wheel stop		
Protections			
Auxiliary supply protection	Voltage too low		

Power supply protection	No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage
Motor protection	Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run), overtemperature, starting too long
Starter protection	Overcurrent, overtemperature, bypass failure, phase shorted, temperature sensor fault, cooling fan fault, maintenance request

Input and Output

<p>Digital inputs</p>	<p>Number of digital input n° 3</p> <p>Digital input type 2 input with dry contact + 1 input with dry contact or PTC (configurable)</p> <p>Digital input functions Programmable (motor start, motor stop, freewheel stop, motor preheating, commands lock, alarms inhibition, thermal status reset, keyboard lock, motor selection, user alarm, command)</p>
<p>Digital outputs</p>	<p>Number of digital output n° 3</p>

Digital output arrangement	2 x 1 NO (SPST) + 1 C/O (SPDT) Ratings: 2 x 1NO contacts: 3A 250VAC - 3A 30VDC 1 x C/O contact: NO contact 5A 250VAC - 5A 30VDC; NC contact 3A 250VAC - 3A 30VDC
Digital output functions	Programmable (line contactor, run, global alarm, limits, remote variable, alarm Axx, user alarm Axx, OFF)

Ambient conditions

Temperature

Operating temperature

min	°C	-20
max	°C	+60°C (with current derating >40°C of 0.5%/ °C)

Storage temperature

min	°C	-30
max	°C	+80

Max altitude

m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
---	--

Relative humidity

%	<80%
---	------

Pollution degree

	2
--	---

Installation category

	III
--	-----

Housing

Mounting

	Screw-fixing or 35mm DIN rail with optional accessory EXP8003
--	---

IP degree of protection

	IP00
--	------


Dimensions (W x H x D)

mm	75 x 218 x 171.5
----	------------------

Weight

Kg	2.1
----	-----

Dimensions

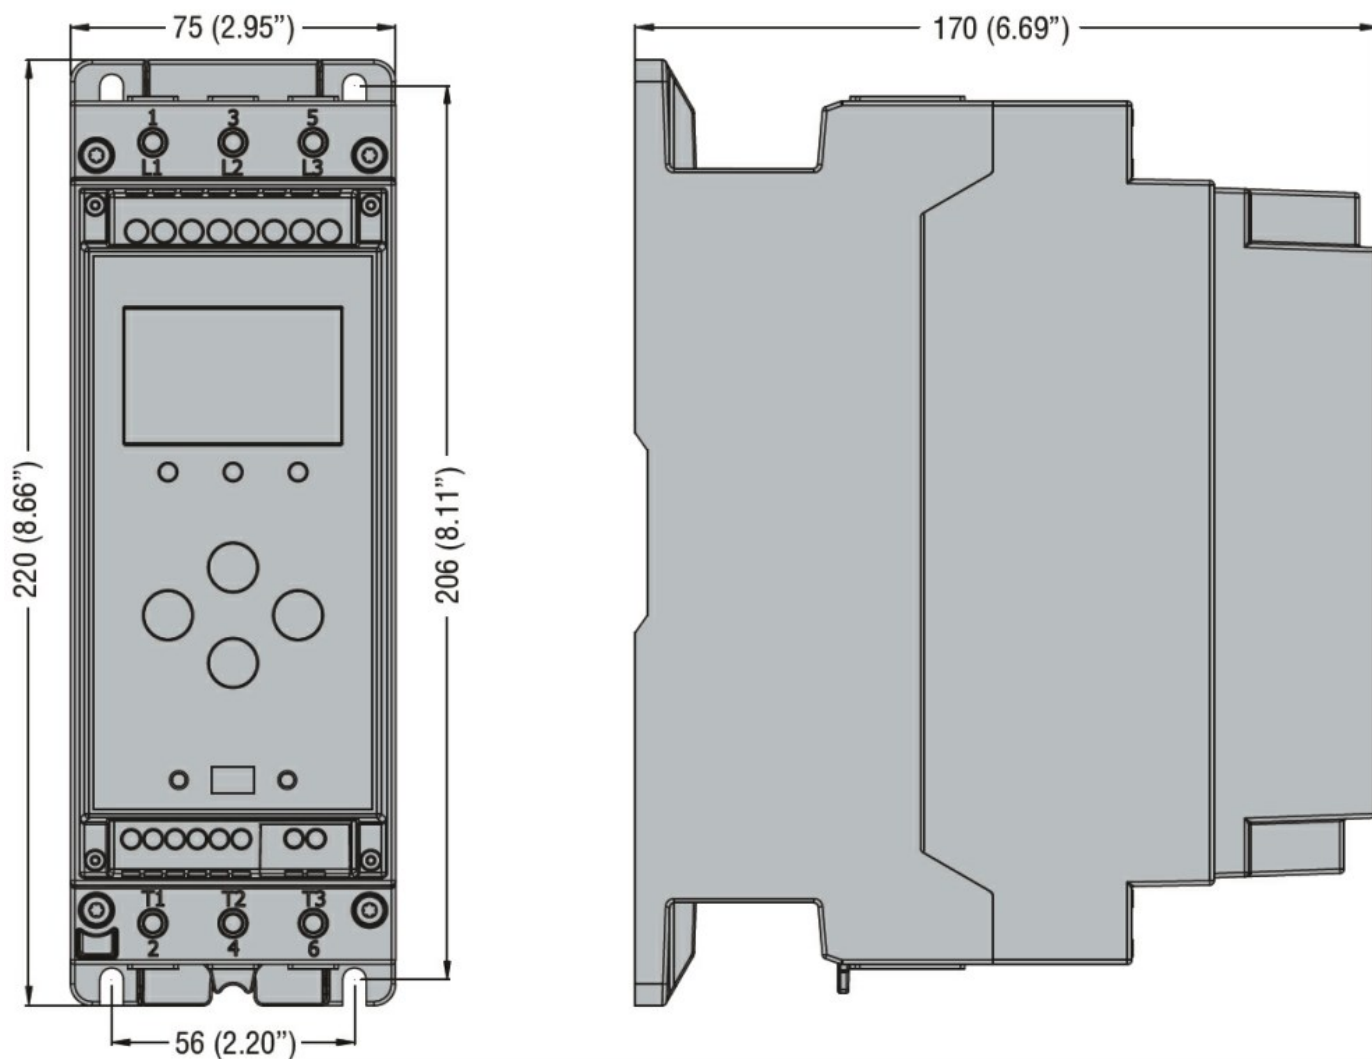

Certifications and compliance

Compliance

CSA C22.2 n° 14
 IEC/EN 60947-1
 IEC/EN 60947-4-2
 UL508

Certificates

cULus
 EAC
 RCM