




Product designation	Variable speed drives
Product type designation	VLB3
General characteristics	
Rated power supply voltage	Three phase 400...480VAC 50/60Hz
Rated output voltage	VAC Three-phase 0...480VAC 0-599Hz
Rated output current	A 9.5 (heavy load) / 11.9 (standard load)
Rated output power	kW 4 (Heavy load) / 5.5 (Standard load)
EMC filter	Built-in EMC suppressor cat. C2
Communication port	Built-in RS485, Modbus RTU protocol
Technical features	
Input type	Three phase
Rated mains voltage	VAC 400...480
Operating mains voltage range	VAC 340...528
Rated mains frequency	Hz 50/60
Operating mains frequency range	Hz 45...65
Rated mains current without mains choke	12.5 (heavy load) / 14 (standard load)
Rated mains current with mains choke	9 (heavy load) / 11 (standard load)
Output type	three-phase
Output voltage range	VAC 0...480
Output frequency range	Hz 0...599
Current overload	%/s 150% for 60s; 200% for 3s
Apparent output power	6.4 (heavy load) / 8 (standard load)
Power loss	4kHz: 110W (heavy load) / 133 (standard load)
Brake chopper	Yes
Switching frequency	2...16kHz
Max motor cable length	


Shielded			
	Without EMC category	m	50m / 100m (40°C max, switching frequency 4kHz max)
	Category C1	m	3
	Category C2	m	20
	Category C3	m	35
Unshielded			
	Without EMC category	m	200
Functions			
Motor control modes			V/f linear, quadratic torque, sensorless vector control, ECO mode, servo control with encoder feedback, multipoint V/f curve, V/f closed loop control with encoder feedback, torque setpoint, sensorless control for synchronous motors up to 22kW
Speed reference signals			External potentiometer 0...10kΩ Voltage signals: 0... 10VDC or -10... +10VDC Current signals: 0/4... 20mA Buttons on front keyboard Door-mount installation kit 15 preset speeds via digital inputs Motor potentiometer Fieldbus
3-wire control			Yes
S-shape curves			Yes
Slip compensation			Yes
Flying restart			Yes
Access to DC bus			Yes
DC braking			Yes
DC injection at start			Yes
PID control			Yes, with sleep and rinse function
Sequencer (programmable frequency/time cycles)			Yes

Preset speeds	Yes
Motorpotentiometer	Yes
Different parameter configuration sets	Yes
Parameters changeover function	Yes
Favorite parameters menu	Yes
Autotuning	No
Safe torque Off (STO) safety function	Optional
PTC probe input	Yes
Protections	Overcurrent Output short circuit and earth/ground leakage Overtoltage Undervoltage Phase loss Motor heat overload (i2t) Overspeed Speed reverse
Special funct.	Multi-pump PID control (1 main pump frequency regulated + 2 auxiliary pumps activated in direct mode in case of necessity)
Input and Output	
Number of digital input	n° 5
Digital input type	Selectable PNP or NPN logic
Number of digital output	n° 2 1 relay output with changeover contact (C/O-SPDT) + 1 digital output
Digital output arrangement	Relay output: 3A 250VAC Digital output: 100mA max 30VDC
Output contacts ratings	
Number of analog input	n° 2 Configurable 0/2...10VDC, -10...+10VDC, 0...5VDC, 0/4...20mA
Analog input type	
Number of analog output	n° 1 configurable as 0...10VDC, 0...5VDC, 2...10VDC, 0/4...20mA
Analog output type	
Ambient conditions	
Temperature	Operating temperature

Current derating	min	°C	-10
	max	°C	+55
			switching frequency 2 or 4kHz: 2.5%/°C over 45°C
Storage temperature			switching frequency 8 or 16kHz: 2.5%/°C over 40°C
	min	°C	-25
	max	°C	+60
Relative humidity		%	5...95% (with no condensing)
Max altitude		m	4000m (over 1000m derate the rated current by 5%/1000m)
Maximum Pollution degree			2
Overvoltage category			III up to 2000m altitude (II above 2000m)
Housing			
Installation position			Vertical
IP degree of protection			IP20
Dimensions (W x H x D)		mm	90 x 278 x 130
Weight		Kg	2.45
Dimensions			

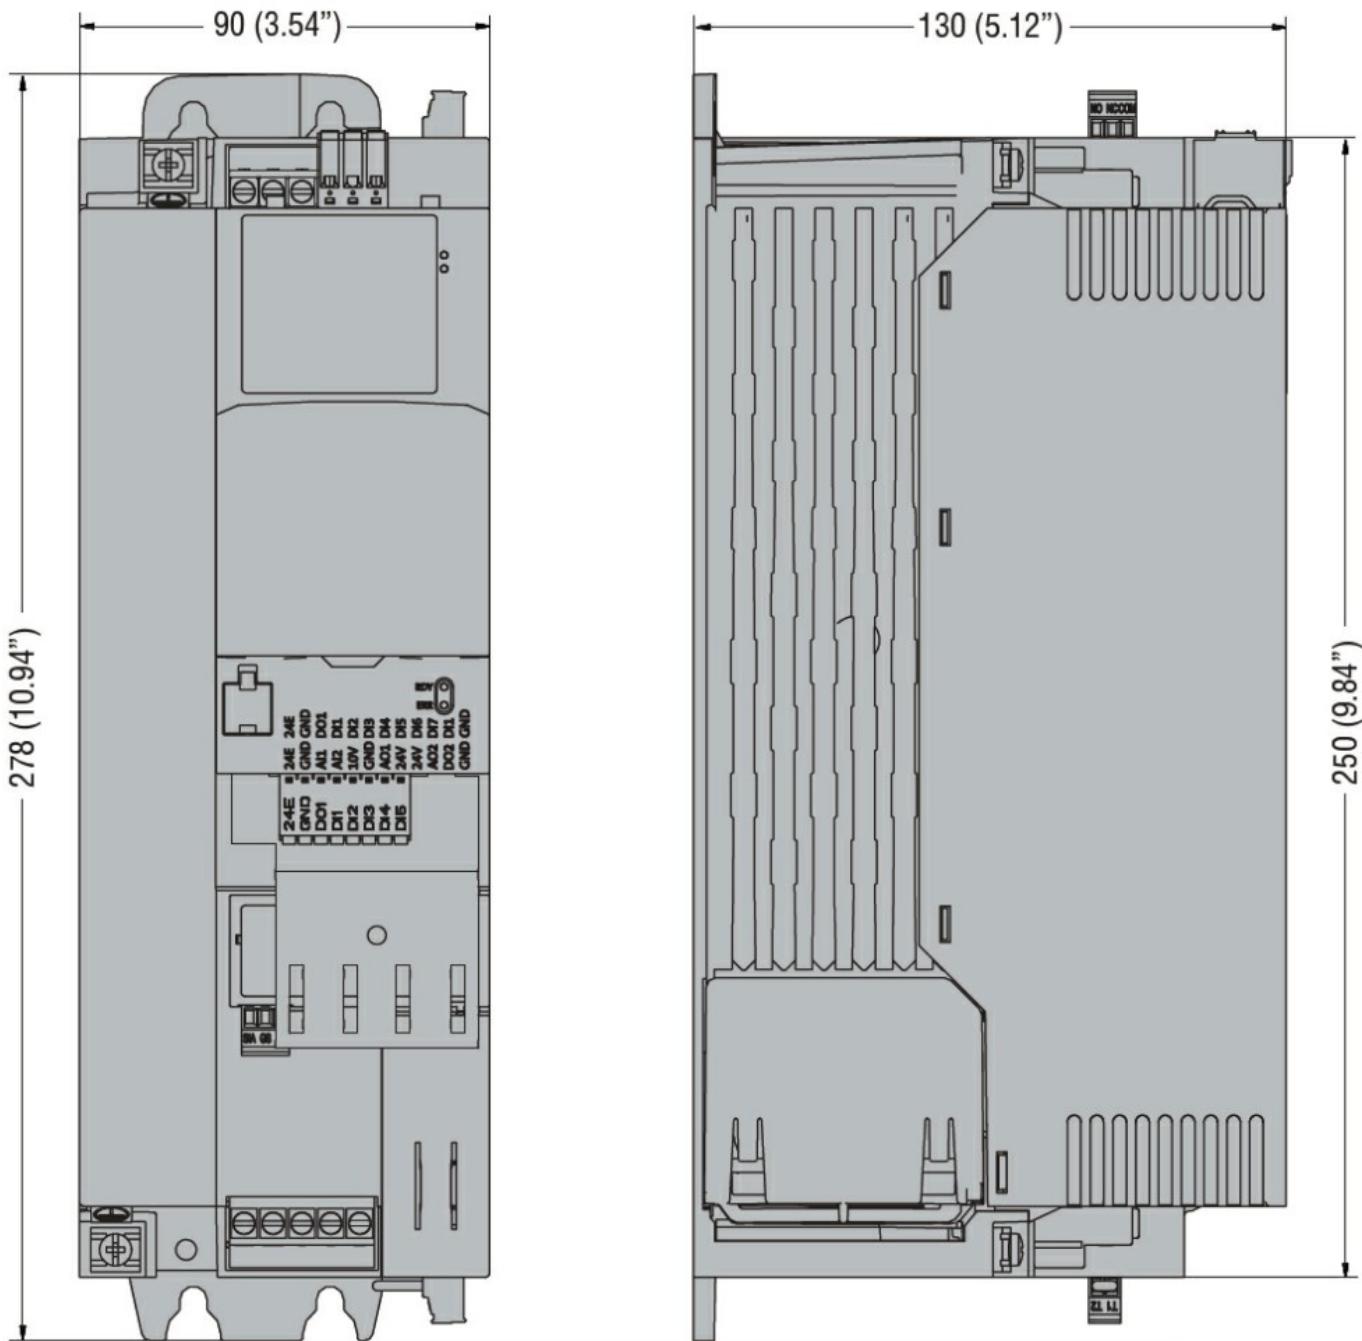

Wiring diagrams

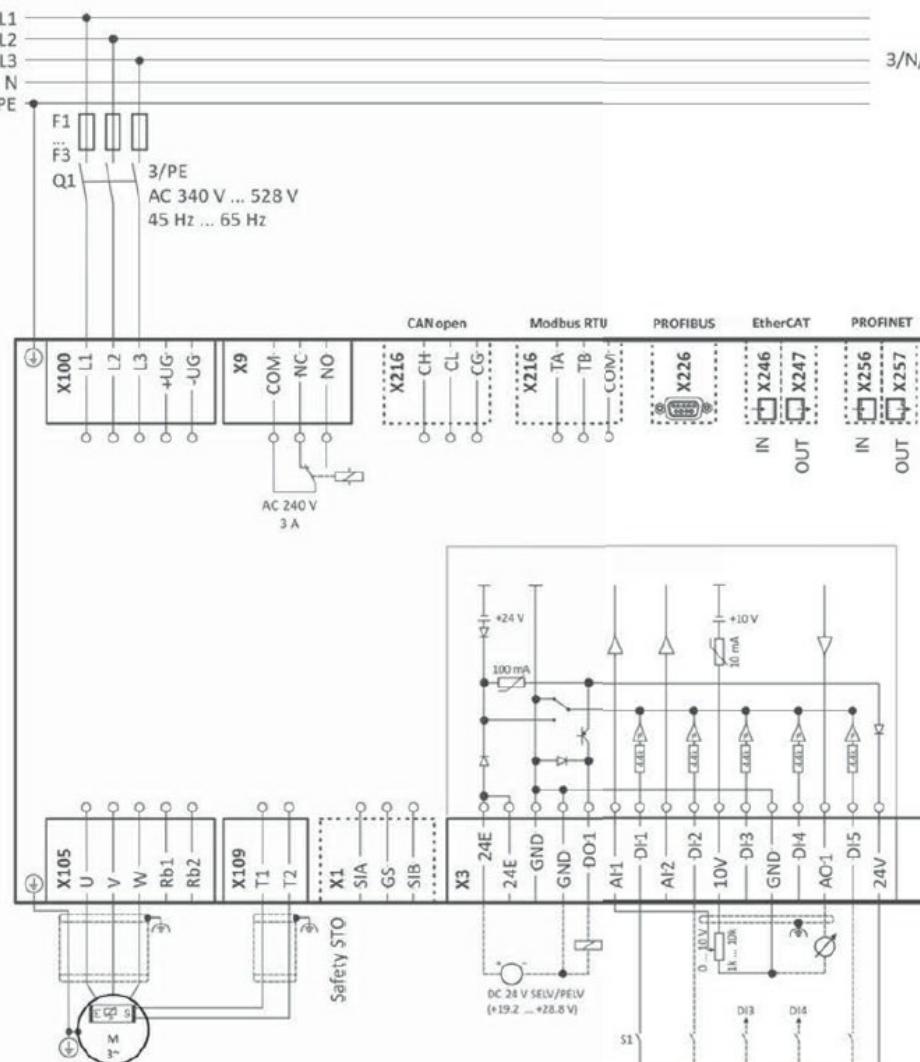

Certifications and compliance

Compliance

CSA 22.2 n°274

EN 61800-5-1

UL61800-5-1

Certificates

CSA

cULus

EAC

RCM