



Motor protective circuit
breaker
SM1P

Product designation

Product type designation

Electrical features

Number of poles	nr.	3
Magnetic protection		yes
Thermal protection		yes
Phase failure detection		Yes
Rated insulation voltage U_i IEC/EN	V	690
Rated impulse withstand voltage U_{imp}	kV	6
Rated frequency	Hz	50/60
Thermal trip adjustment range		9...14
Rated current (I_n)	A	14
Magnetic tripping		13 x I_n
Total power dissipation	W	2.73

Operational short-circuit current breaking capacity (I_{cs}) at AC

230V	kA	100
400V	kA	12.5
440V	kA	5
500V	kA	5
690V	kA	3

Maximum short-circuit current breaking capacity (I_{cu}) at AC

230V	kA	100
400V	kA	25
440V	kA	10
500V	kA	10
690V	kA	3

Breaking capacity short-circuit current (I_{cn}) at DC

150V	kA	0
300V	kA	0
450V	kA	0

Tripping class

10A

IEC Utilization category

A

Operations

Mechanical life	cycles	100000
Electrical life	cycles	100000

Mechanical features

Tightening torque for terminals

min	Nm	2.5
max	Nm	3
min	lbin	1.8
max	lbin	2.2

Max number of wires simultaneously connectable

nr. 2

Conductor section

AWG/Kcmil

min	16
max	8

Flexible w/o lug conductor section

min	mm ²	1
-----	-----------------	---

Flexible c/w lug conductor section

min	mm ²	1
-----	-----------------	---

Flexible with insulated spade lug conductor section

min	mm ²	1
-----	-----------------	---

Screwdriver

PH2

Power terminal protection according to IEC/EN 60529

IP20

Cable stripping length

main circuit mm 1

Ambient conditions

Temperature

Operating temperature


min	°C	-20
max	°C	60

Storage temperature


min	°C	-50
max	°C	80

Compensation temperature	min	°C	-20
	max	°C	50
Max altitude		m	3000
Operating position	normal allowable		Vertical plan Any
Fixing			Screw / DIN rail 35mm
Weight		g	350
UL technical data			
UL508 / UL60947-4-1 Manual Motor Controller - Short circuit current			
Motor Disconnect	at 240V	kA	30
	at 480V	kA	30
	at 600V	kA	30
	protection		100A class J
Group Motor Installation	at 240V	kA	30
	at 480V	kA	30
	at 600V	kA	30
	protection		100A class J
Tap Conductor Protection	at 480Y/277V	kA	50
	at 600Y/347V	kA	50
UL508 / UL 60947-4-1 Manual Self Protected Combination Motor Controller (Type E) Short circuit current			
	UL508 / UL 60947-4-1 Manual Self Protected Combination Motor Controller (Type E) Short-circuit current	50	
	UL508 / UL 60947-4-1 Manual Self Protected Combination Motor Controller (Type E) Short-circuit current	50	
	UL508 / UL 60947-4-1 Manual Self Protected Combination Motor Controller (Type E) Short-circuit current	50	
Maximum UL/CSA horsepower ratings single-phase			
	at 110V-120V	hp	3/4
	at 220V-240V	hp	2
Maximum UL/CSA horsepower ratings three-phase, 3-pole			
	at 200V-208V	hp	3
	at 220V-240V	hp	3
	at 440V-480V	hp	10
	at 550V-600V	hp	10

Dimensions

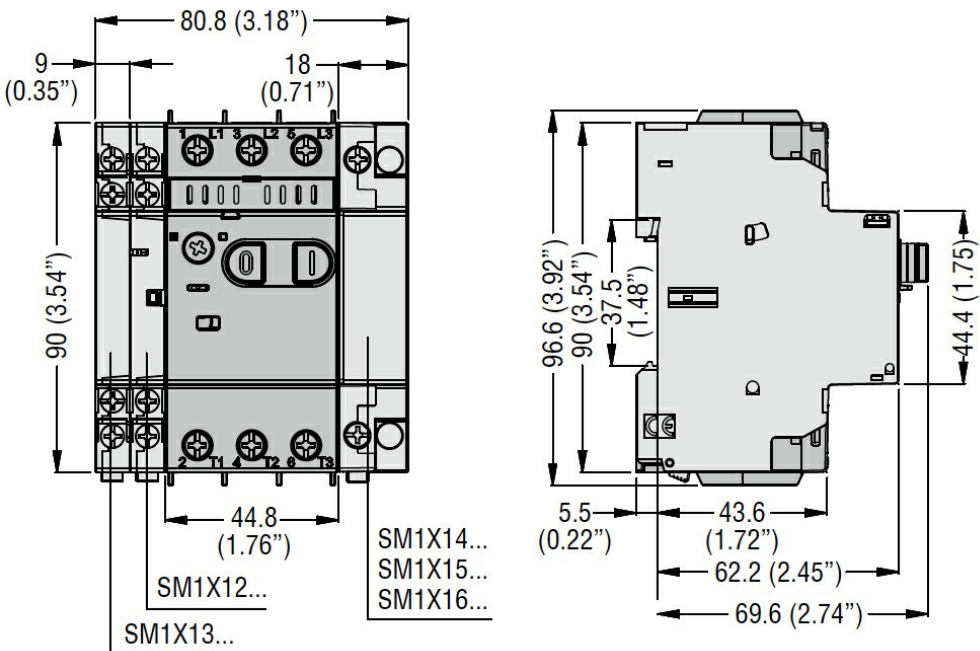

Wiring diagrams

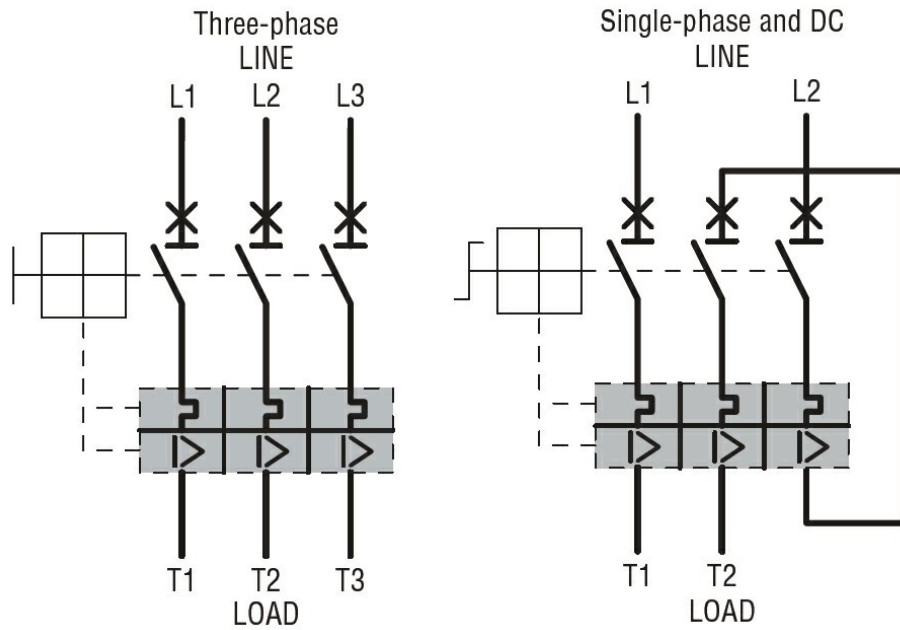

Certifications and compliance

Certifications

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-2
IEC/EN 60947-4-1
UL508

Compliance

cULus
EAC

ETIM 6 classification